


# EI-250

## Digital Weight indicator

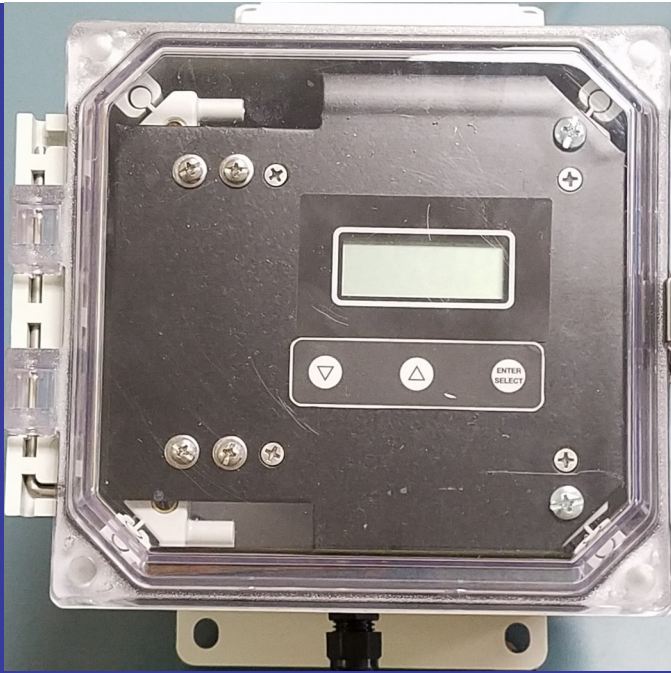

### Features

- Easy to use and install
- Battery powered
- Non volatile memory
- All digital operation
- 4 digit LCD display
- Display s gross and remaining
- Low cost, high quality

EI-250

### Description

Introducing the EI-250 high quality single channel battery-powered digital weight indicator. It is designed for harsh water treatment and chemical feed environments and excels where power is unavailable or unreliable. The simple scale readout is designed to minimize the need for operator training and instrument configuration.

Both gross and remaining weights can be shown on the large 4 digit LCD display. The operator interface is a simple set of pushbuttons which allow all functions of the scale to be accessed from the front panel.

The operating mode of the indicator is clearly displayed on the LCD to differentiate between gross and remaining weights. The indicator is housed in a NEMA 4X enclosure making it suitable for any environment encountered in a municipal water treatment facility.

Your Source for Precision Process Solutions



# EI-250

## Digital Weight Indicator

Power Supply	Two D batteries
Weights displayed	Gross, remaining
Display	One 4 digit .5" LCD
Graduations	1, .5 lbs.
Load cell drive capability	One @ 350 ohms
Operating temp range	0 to 50 °C, 32 to 122 °F
Memory	Non-volatile flash and EEPROM
<b>OPTIONS</b>	
Analog output	4-20 mA DC
Relay	One latching relay

